


CONDUIT DIAMETER	TRENCH WIDTH
$\phi \leq 8"$	24" MIN~32" MAX
$8" < \phi \leq 12"$	28" MIN~36" MAX


EXISTING AC PAVEMENT
(THICKNESS VARIES).

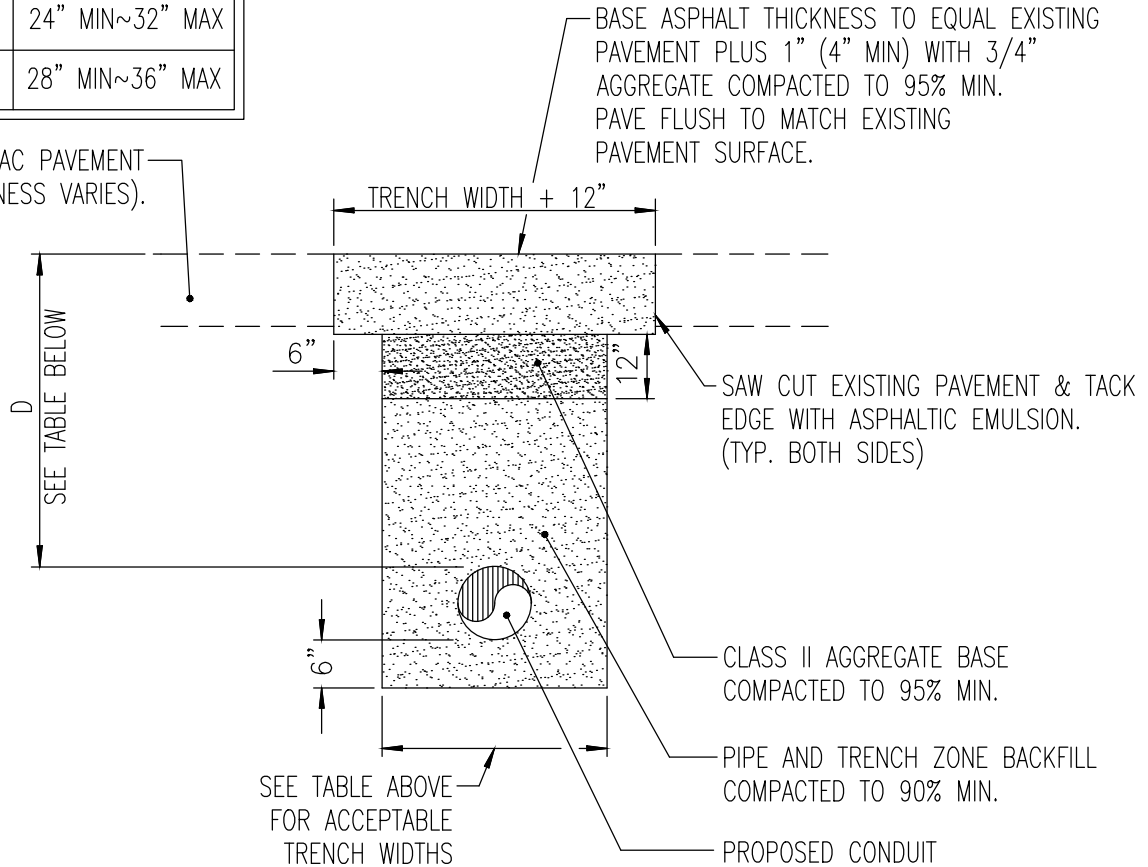

PHASE 1: BASE PAVING

MINIMUM COVER	
DRY UTILITY	MIN. DEPTH
GAS	30"
GAS SERVICE	30"
PRIMARY ELECTRIC	42"
SECONDARY ELECTRIC	30"
ELECTRIC SERVICE	30"
MULTIPLE ELECTRIC CONC. ENCASED	24"
CATV	24"
TELCO	24"

COLD PLANE 1-1/2" & PAVE WITH ASPHALT CONCRETE, 1/2" AGGREGATE. INSTALL FLUSH ON BOTH SIDES OF TRENCH TO MATCH EXISTING.

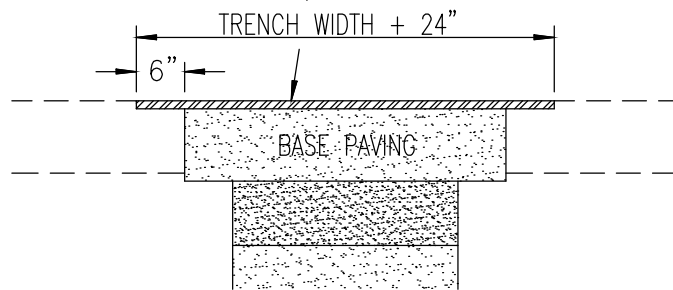

PHASE 2: FINISH PAVING

NOTES:

1. PHASE 2 FINISH PAVING SHALL BE COMPLETED NO EARLIER THAN 14 CALENDAR DAYS AFTER PHASE 1 BASE PAVING OR AS DIRECTED BY THE CITY INSPECTOR.

NOT TO SCALE



CITY OF LEMON GROVE STANDARD DRAWINGS

**STANDARD DRY UTILITY
TRENCH REPAIR DETAIL**

DRAWING
NUMBER

CLG-01